




# AIR-CELL Spacer Biscuits™

EFFECTIVELY ASSIST IN MAINTAINING  
ADEQUATE REFLECTIVE AIR SPACES

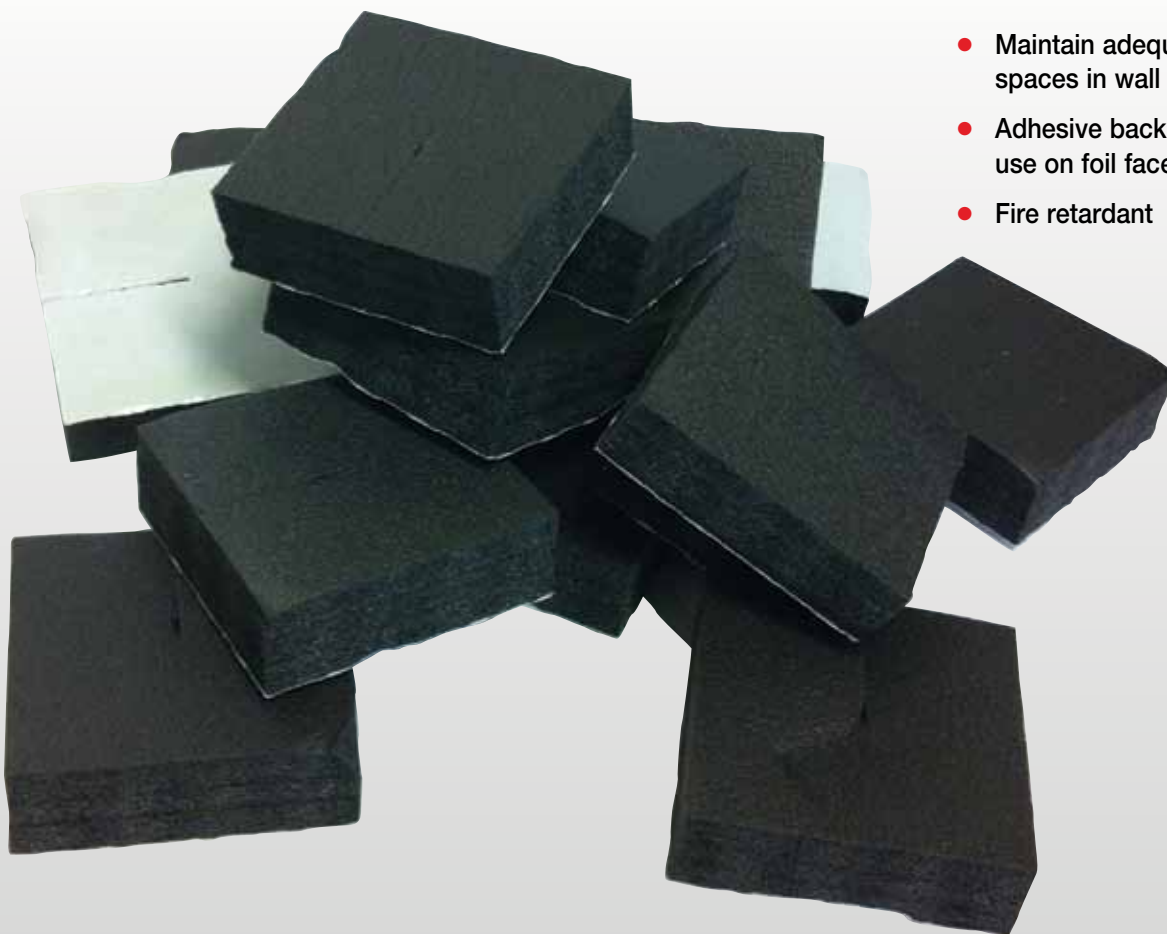

- Maintain adequate reflective air spaces in wall applications
- Adhesive backed for ease of use on foil face
- Fire retardant



*Low Energy –  
Low Carbon Buildings*

# AIR-CELL Spacer Biscuits™

## Product Description

*Kingspan AIR-CELL* Spacer Biscuits™ are made of expanded black polyethylene material and are used to achieve and maintain adequate reflective air spaces between reflective insulation and the adjacent material. The biscuits are slit to allow easy placement over wall ties and provide strong holding power with no long-term deterioration. *Kingspan AIR-CELL* Spacer Biscuits™ can be re-positioned thus allowing alignment with substrate.

To be used in conjunction with *Kingspan AIR-CELL*® insulation to assist in maintaining adequate reflective air spaces in wall applications.

| Product Data      |   |                    |
|-------------------|---|--------------------|
| Product size      | 60 x 60 mm  |                    |
| Thickness         | 20 mm   |                    |
| Sales unit        | Bag of 50 pc  | Box of 400 pc      |
| Unit weight       | 200 g   | 1.8 kg             |
| Unit sizes        | 320 x 120 x 520 mm  | 390 x 385 x 460 mm |
| Temperature range | -20°C to + 85°C Service Temperature<br>105°C Intermittent |                    |

## Management Standards

| Standard      | Management System  |
|---------------|--------------------|
| ISO 9001:2008 | Quality Management |

## Helpful Hints

For a double brick cavity wall application clip *Kingspan AIR-CELL* Spacer Biscuits™ onto every second wall tie, or as required to maintain a nominal 20 mm air space between the brick face and *Kingspan AIR-CELL*® insulation, and push against the brickwork.

For a steel-framed wall application provide for outer air space by adhering the *Kingspan AIR-CELL* Spacer Biscuits™ to the outer face of the *Kingspan AIR-CELL*® insulation (approximately 3 *Kingspan AIR-CELL* Spacer Biscuits™ per square metre required).

Surfaces must be free of dust, oil or other contaminants prior to adhering *Kingspan AIR-CELL* Spacer Biscuits™.



*Kingspan Insulation Pty. Ltd. reserves the right to amend product specifications without prior notice. The information, technical details and fixing instructions etc. included in this literature are given in good faith and apply to uses described. Recommendations for use should be verified as to the suitability and compliance with actual requirements, specifications and any applicable laws and regulations. For other applications or conditions of use, Kingspan Insulation offers a Technical Advisory Service the advice of which should be sought for uses of Kingspan Insulation products that are not specifically described herein. Please check that your copy of the literature is current by contacting us or visiting [www.kingspaninsulation.com.au](http://www.kingspaninsulation.com.au).*



**Kingspan Insulation Pty Ltd**

Tel: 1300 247 235

Email: [info@kingspaninsulation.com.au](mailto:info@kingspaninsulation.com.au)

[www.kingspaninsulation.com.au](http://www.kingspaninsulation.com.au)